


PAYCHECK® DESKTOP 2™

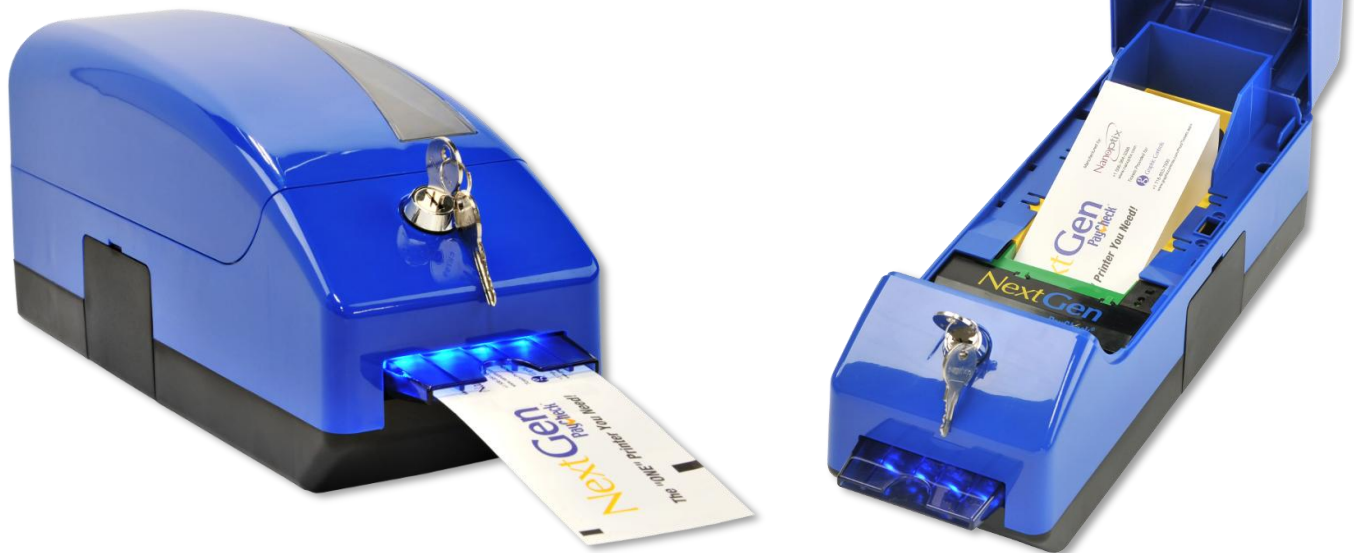

The newest member of the Paycheck® series family, the Paycheck® Desktop 2™. Powered with Paycheck® NextGen™ technology, this desktop model can enhance your cage environment by providing your customers quick TITO tickets, promotional coupons and/or stream lined tax forms, to name a few, while keeping your host engaged one-on-one with your patrons.

FEATURES

- Longest print head life
- Fastest printer in gaming
- Integrated anti-jamming paper path
- Paper low on last ticket or more (adjustable)
- PC based infrastructure
- Straight paper path
- Quick paper path access
- Easy access service USB port
- Ethernet Port
- Durable, intuitive, modular design
- Lockable Enclosure
- Standard 800 Ticket Tray
- Couponing ready
- RoHS compliant

BENEFITS

- Better Reliability and lower overall cost
- Greater Customer Satisfaction
- Reduces paper jams no matter the bezel used
- Save on paper cost by no longer wasting tickets
- Use any fonts, images and logos for your tickets
- No jamming within a presenter
- Makes maintenance fast & easy
- Allows for easy field service and upgrades
- Network Connectivity
- Gives easy access to all major components
- Added Security
- Reduce downtime with larger ticket capacity
- Advertise your services easily
- Usable in all jurisdictions worldwide

NANOPTIX



Side Panels for Extra Connections



Enclosure Opens Directly to the Paper Path

DIMENSIONS (HxWxD)

- 146.3mm (5.76") x 119mm (4.69") x 335.2mm (13.20")

WEIGHT

- 1.35 kg (3 lbs)

PRINTING CHARACTERISTICS

- Print Speed
250 (9.8") per second in text mode(monochrome)
125mm (5") per second in two-color mode
520 dots per line
203 dots per inch
62.5mm (2.46") print zone width (near-edge printing)
8 dots/mm horizontal and vertical

PAPER/MEDIA

- Type: top-coated thermal sensitive
- Ticket width x length
65mm (2.56") x 156mm (6.12") – TITO format
- Ticket thickness: 0.114-0.127mm (0.0045-0.005")
- Perf. Strength: 1.59 +/- 0.27kg (3.5 +/- 0.6 lbs)
- Monochrome or three 2-color choices: red/black, blue/black, green/black

POWER REQUIREMENTS

- 24/12 VDC at 2.4A Maximum (excluding exit lamp)
- Exit lamp: 24/12 VDC
- 20mA required by lighted bezel
- Bezel port can sync up to 2A

RELIABILITY

- Print head:
100km or 100 million pulses for monochrome
(approximately 640,000 TITO tickets)
50km or 50 million pulses for 2 color

HARDWARE SPECIFICATIONS

- 1 GHz Sitara ARM cortex-A8 RISC Processor
- NEON SIMD Coprocessor
- 4 GB on-board Flash
- 512 MB RAM
- Running Linux TI Distro

COMMUNICATION INTERFACE OPTIONS

- Bidirectional RS-232 (up to 57.6 kbps)
- 1 Dedicated USB 2.0 Communication Ports
- 2 Slave USB 2.0 Communication Ports
- Ethernet Port
- MicroSD Card Reader
- GDS protocol
- Windows driver

REGULATORY INFORMATION

- CSA ULc
- FCC Class B
- CE mark
- ICES

ENVIRONMENTAL

- Operating temperature: 0 to 70°C (32 to 158°F)
- Storage & shipping temperature: -20 to 75°C (-4 to 167°F)
- Operating humidity: 5 to 90% RH (non-condensing)

CONFIGURATIONS

- Available in 2 color options: Black or Blue



NANOPTIX

Toll Free: +1-888-983-3030 (North America) – Direct: +1 506-384-3388 – Email: info@nanoptix.com

www.Nanoptix.com

Nanoptix and Nanoptix logo are registered trademarks of Nanoptix Inc.

All other marks are registered trademarks of their respective owners. Nanoptix reserves the right to change product specifications without notice.